


Descriptions

- General purpose amplifier
- High voltage application

Features

- High collector breakdown voltage:
 $V_{CBO} = 180V$, $V_{CEO} = 160V$
- Low collector saturation voltage:
 $V_{CE(sat)} = 0.5V(\text{MAX.})$
- Complementary pair with KBT5401

PIN Connection

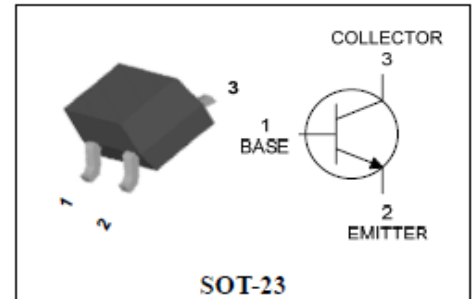

Ordering Information

Type NO.	Marking	Package Code
KBT5551	<u>FNF</u> □ • ① ②	SOT-23

① Device Code ② Year & Week Code • Dalian

Absolute maximum ratings

$T_a = 25^\circ\text{C}$

Characteristic	Symbol	Ratings	Unit
Collector-Base voltage	V_{CBO}	180	V
Collector-Emitter voltage	V_{CEO}	160	V
Emitter-Base voltage	V_{EBO}	6	V
Collector current	I_C	600	mA
Collector dissipation	P_C	200	mW
Junction temperature	T_j	150	$^\circ\text{C}$
Storage temperature	T_{stg}	-50~150	$^\circ\text{C}$

Electrical Characteristics

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Collector-Base breakdown voltage	BV_{CBO}	$I_C = 100 \mu\text{A}$, $I_E = 0$	180	-	-	V
Collector-Emitter breakdown voltage	BV_{CEO}	$I_C = 1\text{mA}$, $I_B = 0$	160	-	-	V
Emitter-Base breakdown voltage	BV_{EBO}	$I_E = 10 \mu\text{A}$, $I_C = 0$	6	-	-	V
Collector cut-off current	I_{CBO}	$V_{CB} = 120\text{V}$, $I_E = 0$	-	-	100	nA
Emitter cut-off current	I_{EBO}	$V_{EB} = 4\text{V}$, $I_C = 0$	-	-	100	nA
DC current gain	$h_{FE(1)}$	$V_{CE} = 5\text{V}$, $I_C = 1\text{mA}$	80	-	-	-
DC current gain	$h_{FE(2)}$	$V_{CE} = 5\text{V}$, $I_C = 10\text{mA}$	80	-	250	-
DC current gain	$h_{FE(3)}$	$V_{CE} = 5\text{V}$, $I_C = 50\text{mA}$	30	-	-	-
Collector-Emitter saturation voltage	$V_{CE(sat)(1)}$ *	$I_C = 10\text{mA}$, $I_B = 1\text{mA}$	-	-	0.2	V
Collector-Emitter saturation voltage	$V_{CE(sat)(2)}$ *	$I_C = 50\text{mA}$, $I_B = 5\text{mA}$	-	-	0.5	V
Base-Emitter saturation voltage	$V_{BE(sat)(1)}$ *	$I_C = 10\text{mA}$, $I_B = 1\text{mA}$	-	-	1	V
Base-Emitter saturation voltage	$V_{BE(sat)(2)}$ *	$I_C = 50\text{mA}$, $I_B = 5\text{mA}$	-	-	1	V
Transition frequency	f_T	$V_{CE} = 10\text{V}$, $I_C = 10\text{mA}$	100	-	400	MHz
Collector output capacitance	C_{ob}	$V_{CB} = 10\text{V}$, $I_E = 0$, $f = 1\text{MHz}$	-	-	6	pF

* : Pulse Tester : Pulse Width $\leq 300 \mu\text{s}$, Duty Cycle $\leq 2.0\%$

Electrical Characteristic Curves

Fig. 1 $h_{FE} - I_C$

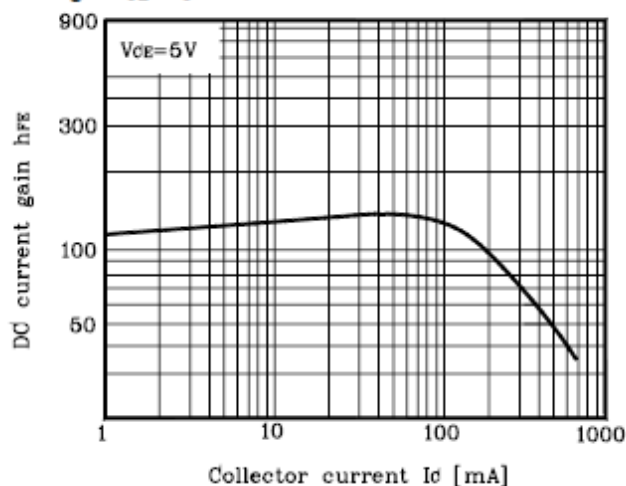


Fig. 2 $I_C - V_{BE}$

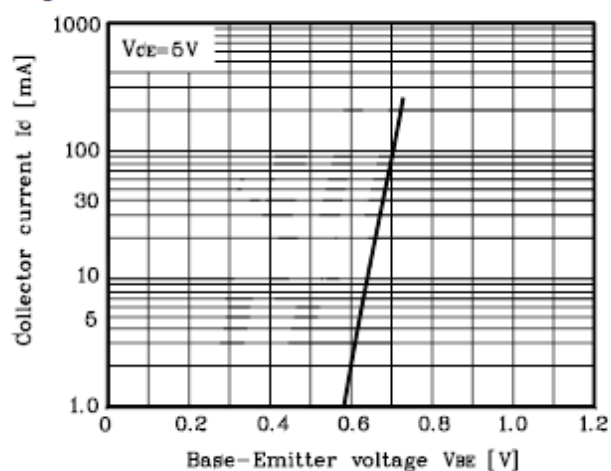


Fig. 3 $f_T - I_C$

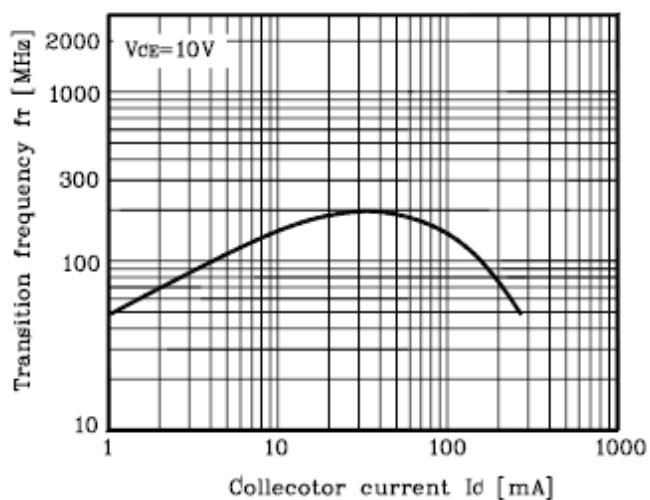


Fig. 4 $V_{CE(sat)}, V_{BE(sat)} - I_C$



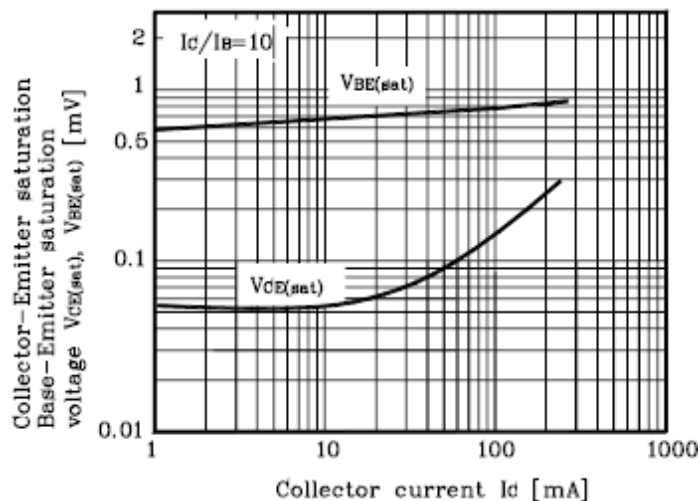


Fig. 5 $C_{ob} - V_{CB}$

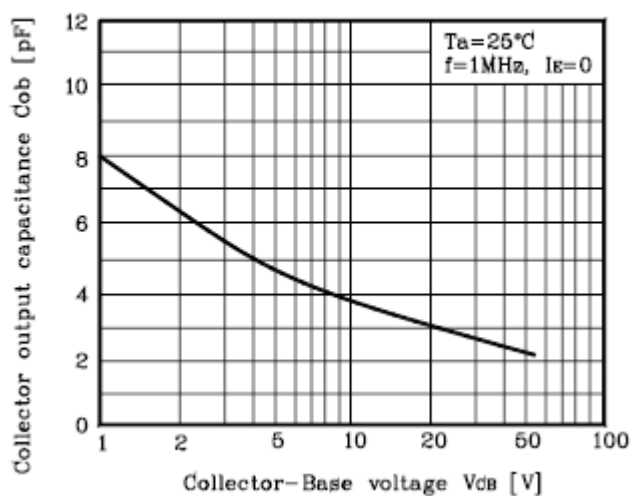


Outline Dimension

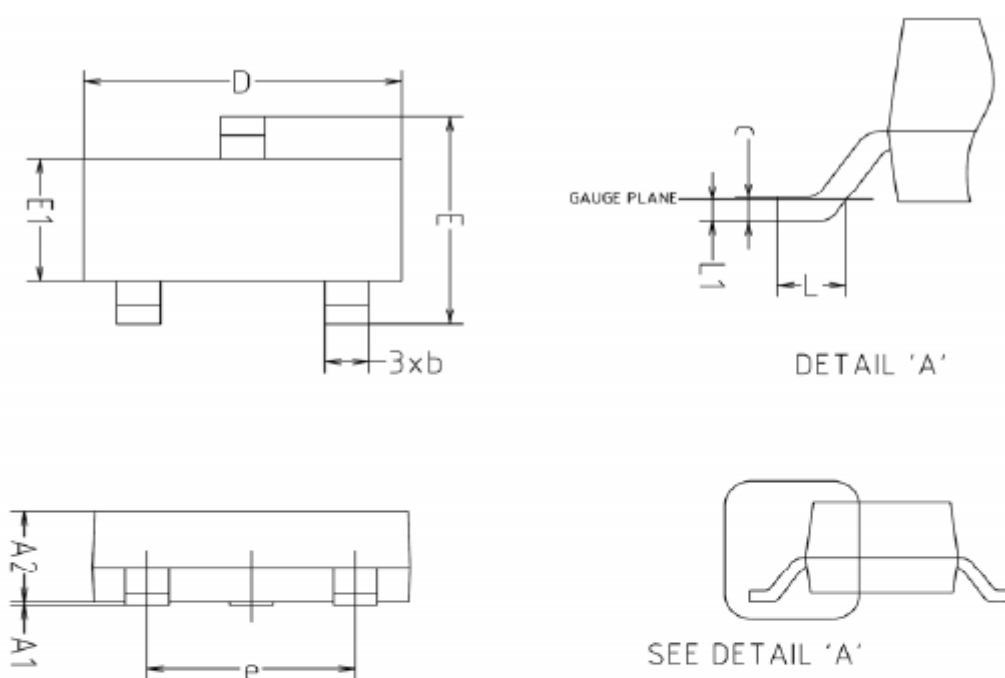

SYMBOL	MILLIMETERS			NOTE
	MINIMUM	NOMINAL	MAXIMUM	
A1	0.00	-	0.10	
A2	0.82	-	1.02	
b	0.39	0.42	0.45	
c	0.09	0.12	0.15	
D	2.80	2.90	3.00	
E	2.20	2.40	2.60	
E1	1.20	1.30	1.40	
e	1.90BSC			
L	0.20	-	-	
L1	0.12BSC			

※Recommend PCB solder land [Unit: mm]

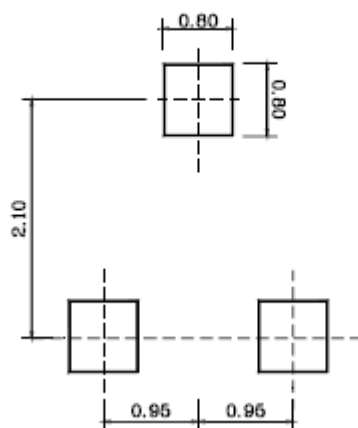

The AUK Dalian Corp. products are intended for the use as components in general electronic equipment (Office and communication equipment, measuring equipment, home appliance, etc.).

Please make sure that you consult with us before you use these AUK Dalian Corp. products in equipments which require high quality and / or reliability, and in equipments which could have major impact to the welfare of human life(atomic energy control, airplane, spaceship, transportation, combustion control, all types of safety device, etc.). AUK Dalian Corp. cannot accept liability to any damage which may occur in case these AUK Dalian Corp. products were used in the mentioned equipments without prior consultation with AUK Dalian Corp..

Specifications mentioned in this publication are subject to change without notice.